


	1	2	3	4	5	6	7	
--	---	---	---	---	---	---	---	--

A	<div>Male</div>							
---	-----------------	--	--	--	--	--	--	--

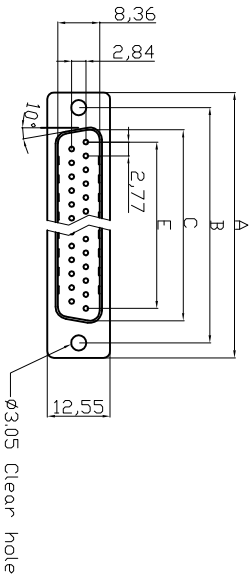

Product Specification

Material


Insulator : Glass-Filled Thermoplastic PBT, UL94V-0,White

Contact : Copper alloy, Gold flash selective gold

Shell: SPCC

Clinch Nut : Brass, Nickel Plated

Screwlock : Brass, Nickel Plated

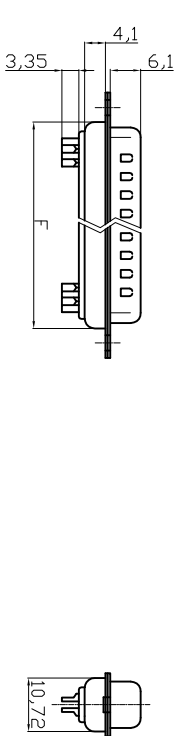

Electrical

Contact Resistance : 20 milliohms Max at 1 AMP DC.

Insulation Resistance : 1000 megohms at 500 VDC

Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Voltage Rating : 250 VAC/rms 60Hz

① OPERATING TEMPERATURE:-55°C+105°C

Order Code:

A-Dx xx LL/Z

Contact style: F - Female
S - Male

No. of Contacts 09 / 15 / 25 / 37

* Quality class III

D	<div> </div>							
E	<div> </div>							
F	<div> </div>							

Dimensions		A	B	C	E	F
Positions						
9		30.81	24.99	16.92	11.08	19.20
15		39.20	33.30	25.25	19.39	27.70
25		53.04	47.04	38.96	33.24	41.10
37		69.40	63.50	55.42	49.86	57.30

50 Positions

	<div><div><div><div>RoHS compliant</div><div>Unit: mm</div></div></div></div>												
G	Scale	Free								Customer-No.	ASSMANN WSW-No. A-Dx xx LL/Z	Drawing-No.	
	TOLERANCE												
	X.	±0.38											
	X.X	±0.25							Approved	13.05.2014	Winnie		
	X.XX	±0.13											
	DIM	TOL											
	X.°	±3°	①	Update operation temperature range					13.05.2014	Winnie			
	X.X°	±1.0°	②	Drawn					15.08.2012	Lucas			
	Angle	TOL	Id.	Modification									
	H	<div><div><div><div>ASSMANN</div><div>WSW/ components</div></div></div></div>										Replace	Sheet 1/2

	1	2	3	4	5	6	7	
--	---	---	---	---	---	---	---	--

